


SPI Petro-Pipe® for FR3 and UV Protection



SPI Petro-Pipe® PIT-416-M1.5 SG SPI Pre-Filter-Canister PFC-44

SPI Petro-Pipe® PIT-416-M1.5 SG is designed for FR3 Soy-Bean Oil. It is 16" long X 3.8" diameter with a 1.5" male fitting that attaches to ball valves and fittings. The Petro-Pipe® is designed to allow rain water to drain while completely filtering out all Vegetable Oils or Fuel Sheen to non-detectable levels. In the event of a major spill, the Petro-Pipe® totally shuts down and prevents all flow from discharging and backs the spill into the containment area.

Pre-Filter-Canister PFC-44

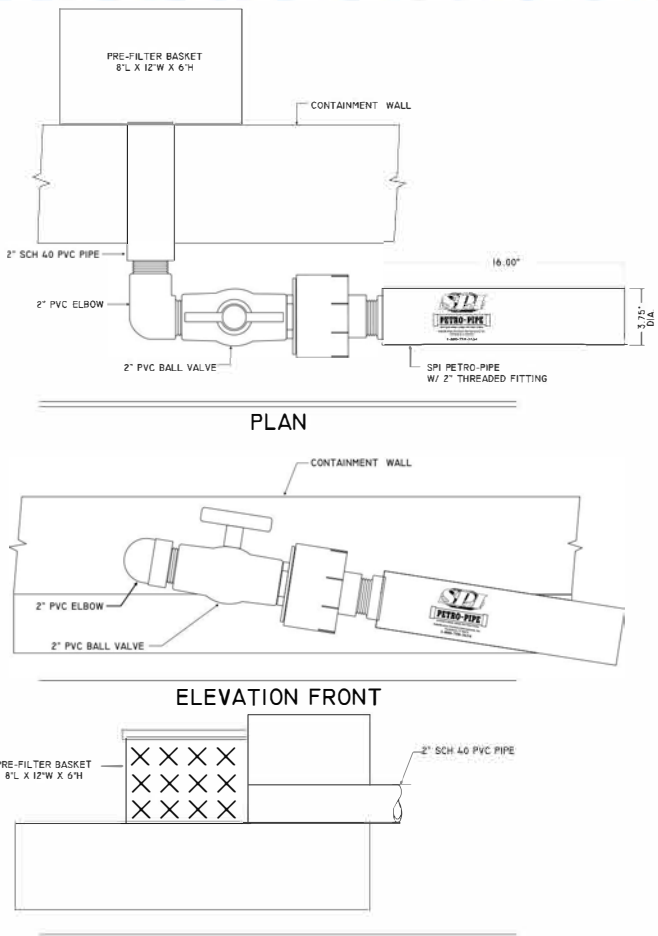

The Petro-Pipe® is installed on a 15° to 25° slope for best results. The PFC-44 is used with the Petro-Pipe® to filter dirt and debris. The canister has a male 1.5" fitting to install onto a ball valve, the complete top unscrews for the replacement of the dirt filters. The discharge end has a 1.5" female fitting that allows the Petro-Pipe® to attach to the PFC-44.

Petro-Pipe® Part Number: PIT-416-SG

Pre-Filter Canister Part Number: PFC-44

Replacement Drain Filters (10 per box) Part Number: RF-PFC44/10 ea.

Pre-Filter Basket Part Number: PFB-810

Replacement Dirt Filters (6 per box) Part Number: RF-PFB10/6 ea.

ELEVATION SIDE
PIT-416 PETRO-PIPE® W/ PRE-FILTER BASKET